



SIRIM QAS International Sdn.Bhd. (Company No.: 410334-X)
No. 1, Persiaran Dato' Menteri, P.O. Box 7035, Section 2
40911 Shah Alam, Selangor Darul Ehsan, Malaysia
Tel. no : 03-55445853 / 55445854
Fax no. : 03-55445855

TEST REPORT

REPORT NO : 2008CB1318	PAGE : 1 OF 2
This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This test report shall not be reproduced, except in full and shall not be used for advertising purposes by any means or forms without written approval from Executive Director, SIRIM QAS International Sdn. Bhd. Please refer overleaf for Conditions Relating To The Use of Test Report.	

Applicant : MTL PRODUCTS MARKETING SDN. BHD.
S 111 Jalan Dato Haji 3,
Taman Dato Yan Yew Lai,
Batu 6 Jalan Puchong,
58200 Kuala Lumpur.

Manufacturer : - Nil -

Product : MTL Durable PP (S/Steel Clad) Adjustable Foot Insert.

Reference Standard/
Method of test : Company's Specification : Compression Load Test .

Description of sample : One sample of MTL Durable PP (S/Steel Clad) Adjustable Foot Insert was received for testing.
Serial No.: 80065


Date received : 18 / 08 / 2008

Job no./Ref. no. : J20085041238 / SQAS / CBMT / T.REC / MSL / 05

Issued date : 25 AUG 2008

Approved Signatories

(MOHD AMIR ABDULLAH)
Technical Executive



(YM RAJA NOR SIHA RAJA ABD. HANAN)

Group Leader
Civil & Construction Section
Product Certification, Inspection & Testing Department

TEST REPORT

REPORT NO : 2008CB1318	PAGE : 2 OF 2
This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This test report shall not be reproduced, except in full and shall not be used for advertising purposes by any means or forms without written approval from Executive Director, SIRIM QAS International Sdn. Bhd.	

TEST RESULTS : COMPRESSION LOAD TEST

SAMPLE REFERENCE	OBSERVATION / REMARKS
MTL Durable PP (S/Steel Clad) Adjustable Foot Insert. Serial No.: 80065	<ul style="list-style-type: none">- Maximum load 6.68 kN load.- The Polyethylene Pipe (PP) fractured. (See photo 2.0)

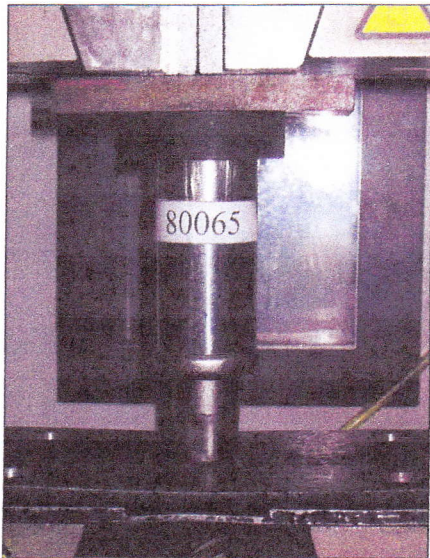


Photo 1.0 : Show sample during test

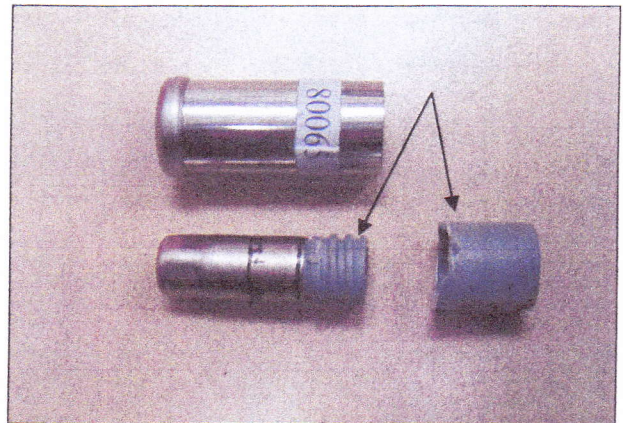


Photo 2.0 : Show sample after test



25 AUG 2008